PI NOLEAK PES
ENTERPRISES CORPORATION
NO LEAK BETWEEN THE PIPES

UYUAN®



XGQT08

ADAPTOR FLANGE

Class150

Reliable Grooved Fitting Solution



Nominal Size mm/in	Pipe O.D mm/in	Dimension L mm/in	X mm/in	Y mm/in	Z mm/in	Bolt/Nut No.~SIZE
50 2	60.3 2.375	65 2.559	155 6.102	121 4.764	16 0.630	4–M16
65 2½	73 2.875	65 2.559	185 7.283	140 5.512	16 0.630	4–M16
80 3	88.9 3.5	65 2.559	190 7.480	153 6.024	16 0.630	8–M16
100 4	114.3 4.5	70 2.756	230 9.055	191 7.520	17 0.669	8–M16
125 5	141.3 5.563	70 2.756	257 10.118	216 8.504	18 0.630	8–M16
150 6	168.3 6.625	70 2.756	285 11.220	241 9.488	19 0.748	8–M20
200 8	219.1 8.625	75 2.953	345 13.583	299 11.772	19 0.748	8–M20
250 10	273 10.75	85 3.346	406 15.984	362 14.252	21 0.827	12–M24
300 12	323.9 12.75	90 3.543	485 19.094	432 17.008	25 0.984	12–M24


PRODUCT OVERVIEW

The **XGQT08** Adaptor Flange is a grooved fitting component designed for secure flange connection in fire protection and piping systems.

FEATURES

- Durable ductile iron construction for high strength and long service life.
- Reliable grooved connection for a secure and leak-resistant joint.
- Class 150 flange compatibility for standard piping integration.
- Easy and quick installation, reducing labor time and cost.
- Suitable for fire protection, water, HVAC, and industrial piping systems.

TECHNICAL DRAWING

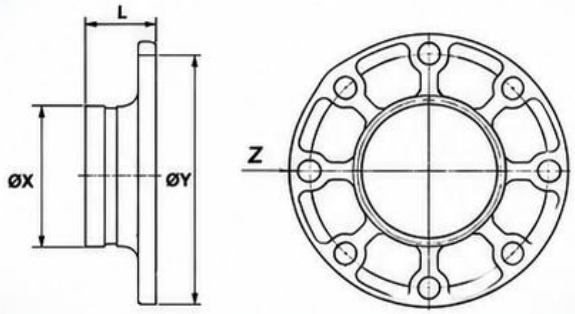

APPLICATIONS

- Fire Protection Systems
- Water Distribution
- HVAC Systems
- Industrial Piping
- General Utility Piping

09159252309 | nowserving02@gmail.com / nowserving03@gmail.com | https://www.pinoleakpes.com/

NO LEAK BETWEEN THE PIPES