




CRAFT®

TECHNICAL DATA SHEET

A47/A48 SPRING LOADED SAFETY VALVE

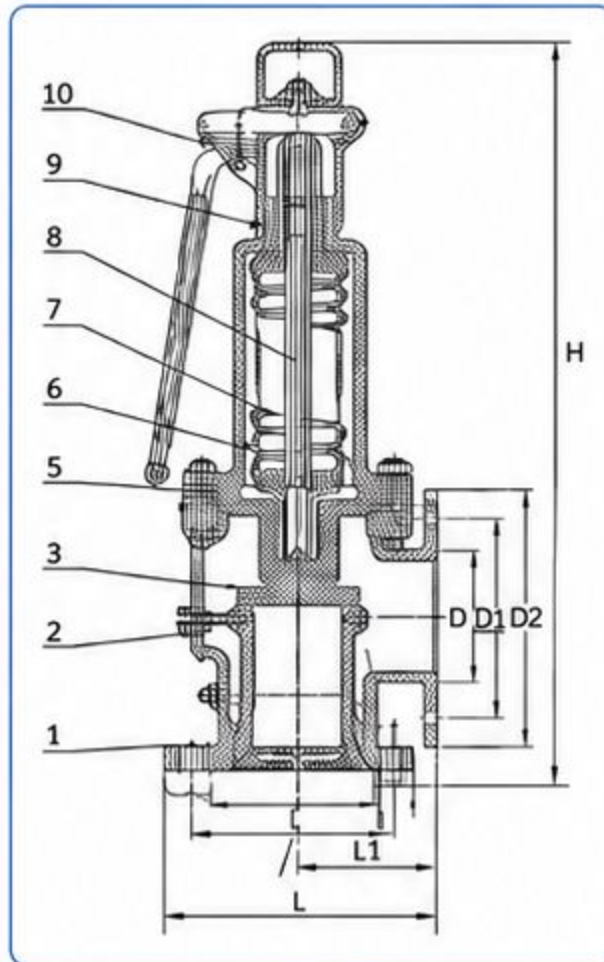

PRODUCT DESCRIPTION

Flange Standard: ASME B16.5 2003
Flange Connection: RF / RF
Flange Pressure: 150LB / 150LB
Suitable Temperature: 300°C
Material: SS304 / SS316 / WCB
Setting Pressure: 0.1 ~ 1.6 MPa
Medium: Non Corrosive Liquid / Gas
Customized Service Available

MAIN PARTS AND MATERIALS

NO.	Part Name	Material
1	Nozzle	WCB + STL
2	Body	WCB
3	Adjusting Ring	ZG2Cr13
4	Disc	2Cr13
5	Guide Sleeve	2Cr13
6	Bonnet	WCB
7	Spring	50CrVA
8	Stem	2Cr13
9	Adjusting Bolt	2Cr13
10	Cap	WCB

MAIN DIMENSIONS

SIZE	D	D1	D2	t	Z-Φd	L1	L	H
1"	108	79.3	51	16	4-15	100	85	274
1 1/4"	117.5	88.9	63.5	18	4-15	115	100	287
1 1/2"	127	99	73	18	4-15	120	110	287
2"	152	120.5	92	18	4-19	135	120	352
2 1/2"	178	139.5	105	20	4-19	140	130	384
3"	190	152.5	127	22	4-19	160	135	397
4"	279	190.5	157	22	8-19	170	160	508
6"	279	241.5	216	24	8-22	205	195	594
8"	343	298.5	270	27	8-22	240	230	686
10"	405	362	320	30	12-26	350	320	927



SUPPLIER INFORMATION

Company: PI NOLEAK PES ENTERPRISES CORPORATION
Role: Supplier of Industrial Valves and Fittings



Mobile: 0915-925-2309 | 0975-569-1036



Telephone: (02) 8285-7080



Email: nowserving01@gmail.com



Email: nowserving02@gmail.com

