PI NOLEAK PES
ENTERPRISES CORPORATION
NO LEAK BETWEEN THE PIPES



LUYUAN®

XGQT07

Grooved Concentric Reducer



Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension L mm/in
32 × 25 1¼ × 1	42.4 × 33.7 1.660 × 1.315	350 2.5	
40 × 25 1½ × 1	48.3 × 33.7 1.900 × 1.315	350 2.5	
40 × 32 1½ × 1¼	48.3 × 42.4 1.900 × 1.660	350 2.5	
50 × 32 2 × 1¼	60.3 × 42.4 2.375 × 1.660	350 2.5	
50 × 40 2 × 1½	60.3 × 48.3 2.375 × 1.900	350 2.5	
65 × 25 2½ × 1	73.0 × 33.7 2.875 × 1.315	350 2.5	
65 × 32 2½ × 1¼	73.0 × 42.4 2.875 × 1.660	350 2.5	
65 × 40 2½ × 1½	73.0 × 48.3 2.875 × 1.900	350 2.5	64 2.520
65 × 50 30D × 1	73.0 × 33.7 3.000 × 1.315	350 2.5	
65 × 32 30D × 1¼	76.1 × 42.4 3.000 × 1.660	350 2.5	
65 × 40 30D × 1½	76.1 × 48.3 3.000 × 1.900	350 2.5	
65 × 50 30D × 2	76.1 × 60.3 3.000 × 2.375	350 2.5	
80 × 25 3 × 1	76.1 × 33.7 3.500 × 1.315	350 2.5	
80 × 32 3 × 1¼	88.9 × 42.4 3.500 × 1.660	350 2.5	
80 × 50 3 × 2	88.9 × 60.3 3.500 × 2.375	350 2.5	


Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension L mm/in
80 × 65 3 × 2½	88.9 × 73.0 3.500 × 2.875	350 2.5	
80 × 25 3 × 30D	88.9 × 76.1 3.500 × 3.000	350 2.5	
100 × 25 4 × 1	108.0 × 33.7 4.250 × 1.315	350 2.5	
100 × 32 4 × 1¼	108.0 × 42.4 4.250 × 1.660	350 2.5	
100 × 40 4 × 1½	108.0 × 48.3 4.250 × 1.900	350 2.5	76 2.992
100 × 50 4 × 2	108.0 × 60.3 4.250 × 2.375	350 2.5	
100 × 65 4 × 2½	108.0 × 73.0 4.250 × 2.875	350 2.5	
100 × 25 4 × 30D	108.0 × 76.1 4.250 × 3.000	350 2.5	
100 × 80 4 × 3	108.0 × 88.9 4.250 × 3.500	350 2.5	
100 × 32 4 × 1¼	114.3 × 42.4 4.500 × 1.660	350 2.5	
100 × 40 4 × 1½	114.3 × 48.3 4.500 × 1.900	350 2.5	
100 × 50 4 × 2	114.3 × 60.3 4.500 × 2.375	350 2.5	89 3.504
100 × 65 4 × 2½	114.3 × 73.0 4.500 × 2.875	350 2.5	
100 × 80 4 × 3	114.3 × 88.9 4.500 × 3.500	350 2.5	
125 × 25 5 × 1	139.7 × 33.7 5.500 × 1.315	350 2.5	

Product Overview

The LUYUAN XGQT07 Grooved Concentric Reducer is a grooved-end fitting used to connect two pipes of different sizes on the same centerline, ensuring a smooth and efficient transition in piping systems.

Key Features

- Grooved connection for fast and reliable installation
- Concentric design for smooth flow transition
- Durable, high-strength ductile iron construction
- Suitable for fire protection and general piping systems
- Meets industry performance and quality standards

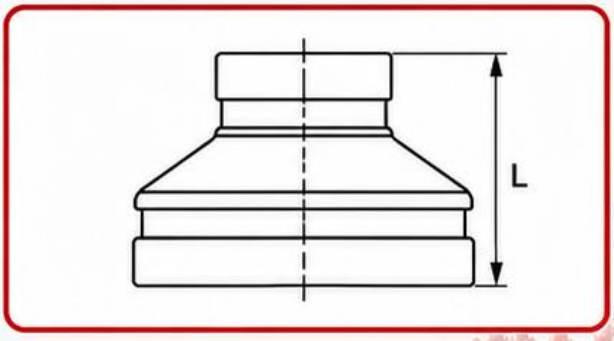

Applications

- Fire Protection Systems
- Water Distribution
- HVAC Systems
- Industrial Piping
- General Utility Systems

09159252309 | nowserving02@gmail.com / nowserving03@gmail.com | https://www.pinoleakpes.com/