


S.S (304/316), 2 - PC BALL VALVE 150LB

Two - Piece Body, Floating Ball
Full or Reduced Bore, Blowout Proof Stem
Fire - Safe and Anti - Static
WCB Body and Stainless Steel Ball

Standards Compliance

Face to Face Dimensions: API 6D
End Flange Dimensions: ANSI B 16.5
Shell Wall Thickness: BS 5351
Basic Design: BS 5351. API 6D
Seat Test: 315 PSI (Hydrostatic)
80 PSI (Air)
Shell Test: 450 PSI (Hydrostatic)

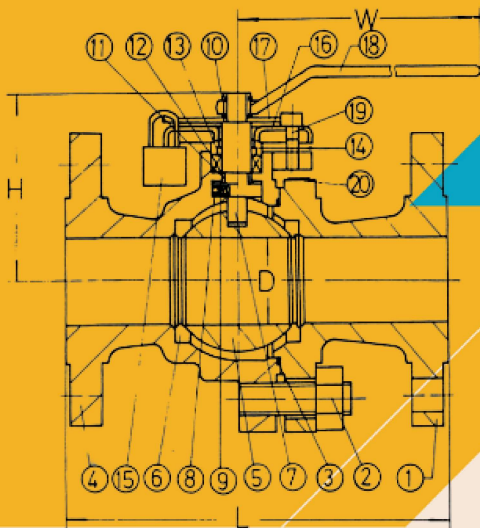

Material List

No.	Part Name	Qty	Material
1	Body Cap	1	CF8/CF8M
2	Stud/Nut		B7/2H
3	Gasket	1	PTFE
4	Body	1	CF8/CF8M
5	Ball	1	304/316
6	Seat	2	Glass Fibre PTFE
7	Stem	1	304/316
8	Pin	1	304/316
9	Spring	1	304/317
10	Snap Ring	1	Carbon Stell
11	Stem Bearing	1	Glass Fibre PTFE
12	Packing	1	PTFE
13	Stem Bushing	1	Glass Fibre PTFE
14	Gland	1	304
15	Lock	1	
16	Gland Plate	1	CF8/CF8M
17	Handle Stop	1	CF8/CF8M
18	Lever/Handle	1	Ductile Iron
19	Bolt	2	B7
20	Nameplate	1	321

Note: 1. 315 Ball on Request
2. Trunnion mounted type for 10" and larger

Dimensions & Weights

MM & KG

Size (Inch)	2"	2 1/2"	3"	4"	6"	8"	10"
D	(BF)	51	64	76	102	152	254
	(BR)	38	51	64	76	102	203
L(RF)		178	190	203	229	394	533
H		120	155	175	210	290	472
W		230	300	300	300	500	1100