



SPSR

SPEAKER STROBE

(ADDRESSABLE)

FDAS NOTIFIER®

The SPSR Speaker Strobe is a low-profile, addressable notification appliance that combines a high-performance audio speaker and a powerful strobe light in a single unit. It is designed to deliver both audible and visual signals for life safety notification in commercial, industrial, and institutional applications. Fully compatible with NOTIFIER FDAS addressable fire alarm control panels.



HIGH OUTPUT
AUDIO



POWERFUL
STROBE



ADDRESSABLE
TECHNOLOGY




RELIABLE
PERFORMANCE

FEATURES

- ✓ Addressable speaker strobe notification appliance
- ✓ High output audio with low current draw
- ✓ Powerful strobe for maximum visibility
- ✓ Low-profile, modern design
- ✓ Field-selectable candela settings
- ✓ Wide range of tone and volume settings
- ✓ Synchronize strobe and/or audio using built-in sync
- ✓ Built-in short circuit isolator
- ✓ Compatible with NOTIFIER FDAS systems
- ✓ UL Listed / FM Approved
- ✓ Easy installation with plug-in design

DIMENSIONS

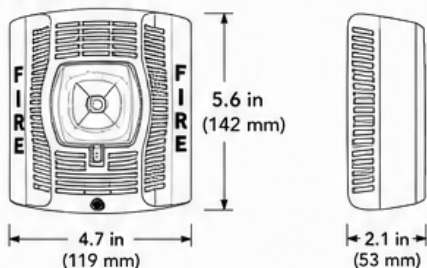

STROBE CANDELA SETTINGS

Candela Settings	15 cd	30 cd	75 cd	95 cd	110 cd	135 cd	150 cd	177 cd
Current @ 24 VDC (Typical)	15 mA	25 mA	45 mA	60 mA	70 mA	80 mA	90 mA	105 mA

APPLICATIONS



SPECIFICATIONS

Model	SPSR
Product Type	Speaker Strobe (Addressable)
Protocol	NOTIFIER FDAS
Operating Voltage	15 – 32 VDC
Standby Current	350 µA @ 24 VDC
Alarm Current (Audio)	3.3 mA @ 24 VDC
Alarm Current (Strobe)	See Candela Settings Below
Audio Output	High output, field-selectable tones
Strobe Output	Field-selectable: 15, 30, 75, 95, 110, 135, 150, 177 cd
Synchronization	Built-in synchronization for strobe and/or audio
Mounting Type	Wall Mount
Operating Temperature	0°C to 49°C (32°F to 120°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	10% to 93% RH (Non-condensing)
Color	Red
Dimensions (H x W x D)	5.6" x 4.7" x 2.1" (142 mm x 119 mm x 53 mm)
Weight	0.35 kg
Approvals	UL Listed, FM Approved
Compatibility	NOTIFIER FDAS Addressable Fire Alarm Control Panels

CERTIFICATIONS



WHY CHOOSE
FDAS NOTIFIER®?

- ✓ Advanced Addressable Technology
- ✓ Reliable and Durable Performance
- ✓ Easy Installation and Maintenance
- ✓ Trusted Brand Worldwide



www.pino leakpes.com



nowserving@pino leakpes.com



(02) 8285-7080



PI NOLEAK PES
ENTERPRISES CORPORATION

NO LEAK BETWEEN THE PIPES