

V2-YST-A150

Y-STRAINER | PRODUCT SPECIFICATION INFOGRAPHIC

Honeywell

Environmental Controls

FORGED BRASS



Built for clean, reliable flow

Threaded Y-strainer for water, steam and oil service.

- 1 BODY**
Forged brass body
- 2 COVER**
Bolted bonnet cover
- 3 SCREEN**
SS304 perforated screen
- 4 THREAD**
NPT / BSP threading

SIZE RANGE

1/2" - 2"

PRESSURE

200 psi

TEMP. RANGE

-20 C to 150 C


MEDIA

Water / Steam / Oil

CONSTRUCTION MATERIALS

NO.	COMPONENT	MATERIAL	STANDARD
1	Body	Forged Brass	ASTM B124, C37700
2	Bonnet	Forged Brass	ASTM B124, C37700
3	Filter	Stainless Steel	AISI 304
4	Sealing Washer	Teflon	PTFE

TECHNICAL PROFILE

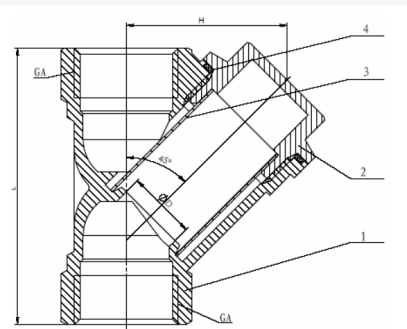

DIMENSIONS (mm)

Size	NPT Part No.	BSP Part No.	L	H	D
1/2"	V2-YST-A150-A050	V2-YST-A150-B015	56	32	14
3/4"	V2-YST-A150-A075	V2-YST-A150-B020	69	41	19
1"	V4-YST-A150-A100	V2-YST-A150-B025	82	49	25
1 1/4"	V4-YST-A150-A125	V2-YST-A150-B032	90	57	30
1 1/2"	V4-YST-A150-A150	V2-YST-A150-B040	101	62	38
2"	V4-YST-A150-A200	V2-YST-A150-B050	123	75	48

CONNECTION SOURCE NOTE

Threaded ends - available in NPT and BSP configurations.
Specifications and part numbers retained from the original V2-YST-A150 product sheet.