



2-PIECE BALL VALVE THREADED END (V2) FEMALE- NPT

Features:

- Full Port
- 1000 WOG
- Blow-out proof stem
- Locking Device (optional)
- ASME B16.34 Shell & Seat Test



| No. | Part Name | Material | |
|-----|---------------|-----------|---------------|
| | | ASTM A351 | ASTM A216 |
| 1 | Body | CF8M | WCB |
| 2 | Ball | SS316 | SS304 / SS316 |
| 3 | Cap | SS316 | WCB |
| 4 | Seat | PTFE | PTFE |
| 5 | Gasket | PTFE | PTFE |
| 6 | Stem | SS316 | SS304 / SS316 |
| 7 | Stem Packing | PTFE | PTFE |
| 8 | Handle | SS304 | SS304 |
| 9 | Nut | SS304 | SS304 |
| 10 | Thrust Washer | PTFE | PTFE |
| 11 | Galand Nut | SS304 | SS304 |
| 12 | Spring Washer | SS304 | SS304 |
| 13 | Handle Cover | PVC | PVC |
| 14 | Locking Pad | SS | SS304 |

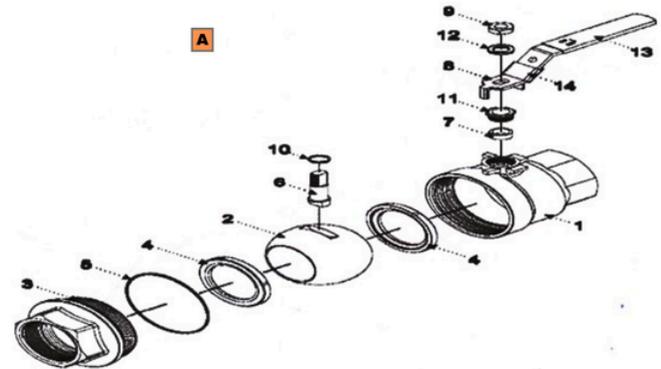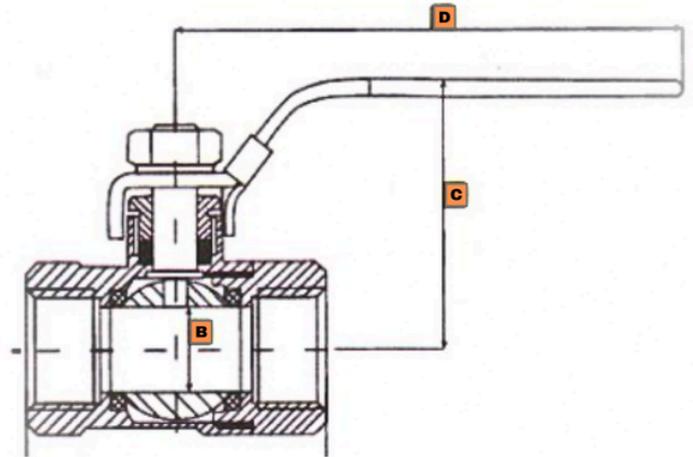

| Size | A | B | C | D | Weight (kg.) |
|------|-------|------|------|-------|--------------|
| ¼" | 2.42 | 0.45 | 1.88 | 4.00 | 0.30 |
| ⅜" | 2.42 | 0.50 | 1.88 | 4.00 | 0.30 |
| ½" | 2.5 | 0.60 | 1.90 | 4.00 | 0.35 |
| ¾" | 2.95 | 0.80 | 2.15 | 5.00 | 0.58 |
| 1" | 3.58 | 1.00 | 2.71 | 5.70 | 1.20 |
| 1-¼" | 3.93 | 1.25 | 3.03 | 5.70 | 2.20 |
| 1-½" | 4.65 | 1.50 | 3.31 | 7.50 | 2.80 |
| 2" | 5.41 | 2.00 | 3.65 | 7.50 | 4.30 |
| 2-½" | 6.54 | 2.50 | 5.38 | 10.00 | 8.40 |
| 3" | 7.6 | 3.00 | 5.80 | 10.00 | 14.50 |
| 4" | 10.34 | 4.00 | 6.80 | 11.35 | 19.00 |

