

AQUAJET FLOW METER

PINOLEAKPES CORPORATION

10 Aberdeen St., Project 8 Quezon City 1106 Metro Manila
Contact Nos. (02)8285-7080, (02)8658-6372
Email: nowserving01@gmail.com/ nowserving03@gmail.com

Applications


Totalize the total volume of cold water through the water main pipeline it is suitable for industrial use.

Operating Condition:


The water temperature: Up to 40°C the maximum admissible water pressure: 1MPa

Features:

Model LXSC is a full bore helix type, magnetic drive, dry dial water with an interchangeable measuring unit, it has the advantages of small resistance, negligible head loss, big capacity, excellent accuracy and long life of service. The measuring unit with sealed indicator offers the meter with very clear reading condition.

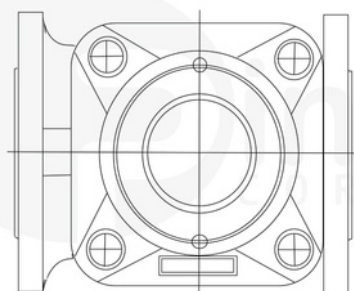

Top View

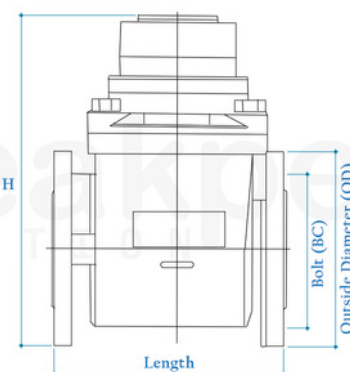

Front View

Dimensions:

Size (mm)	L	H	Connecting Flange		
			OD	BC	Connecting Bolt
50	200	247	165	125	4-M16
80	225	264.5	200	160	8-M16
100	250	271.5	220	180	8-M16
150	300	301.5	285	240	8-M19
200	350	358	340	295	8-M19

Size	Max Flow	Nominal Flow	Transitional Flow (m3/h)	Min. Flow	Min. Reading	Max Reading (m3)
50	30	15	3	0.45	0.01	999999.9
80	80	40	8	1.2	0.01	999999.9
100	120	60	12	1.8	0.01	999999.9
150	300	150	30	4.5	0.1	999999.9
200	500	250	50	7.5	0.1	999999.9